




ALARM Series 1000-1 & 1000-4

Alarm monitors equipment malfunction and failure, liquid level changes, temperature changes, or other conditions which are triggered by an electrical pilot duty contact. The units are housed in a hinged, corrosion resistant, Noryl box for indoor (Series 1000-1), or outdoor use (Series 1000-4). An audible alarm is provided, along with a Test/Silence Switch. A light is mounted to the panel door and remains lit for as long as an alarm condition persists. The relay, buzzer, and terminal strip mount to a printed circuit board, to which the power and electrical pilot duty device are wired. Mounting ears are provided, as well as two tapped entrance holes and their appropriate liquid tight connectors. Series 1000-1 alarms are equipped with a plug-in power cord.

Dimensions:	L	x	W	x	D	Specifications:
Enclosure	6-9/16		4-5/8		3-3/4	-80 db. @ 10 feet .16 Buzzer
Mounting	6-1/32		3-1/32			-SPDT relay, 10 A. @ 115 VAC.

ORDERING INFORMATION: Specify Series 1000-1 for indoor use:
specify Series 1000-4 for outdoor use.

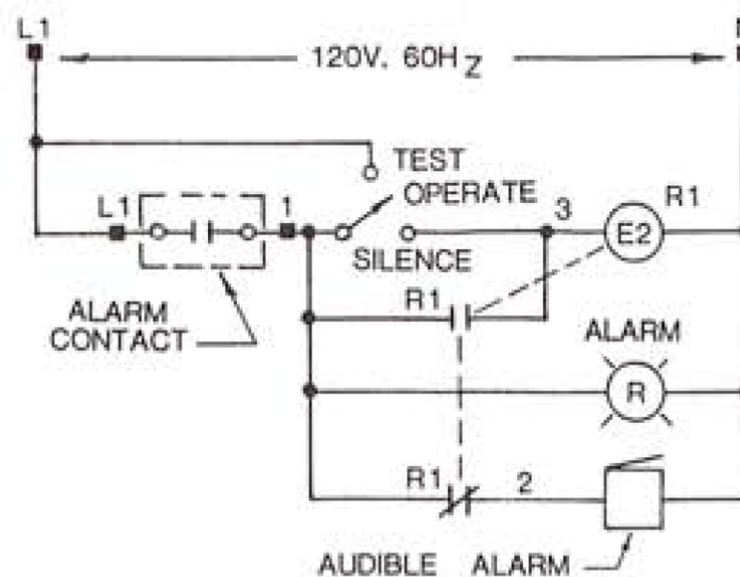

*Series 1000-4 pictured above.

App4Water
410.744.9040 phone
410.744.6062 fax
sales@app4water.com
www.App4Water.com